



- 1. Taboe Sani
- 2. Taboe
- 3. Taboe Freestanding

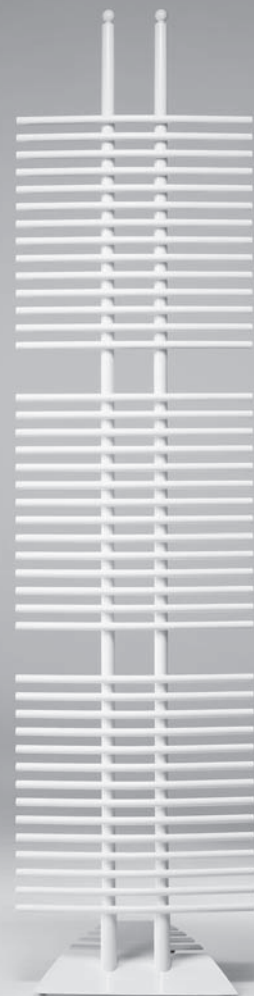


1

2

- 1. Taboe Sani Single
- 2. Taboe Sani Double

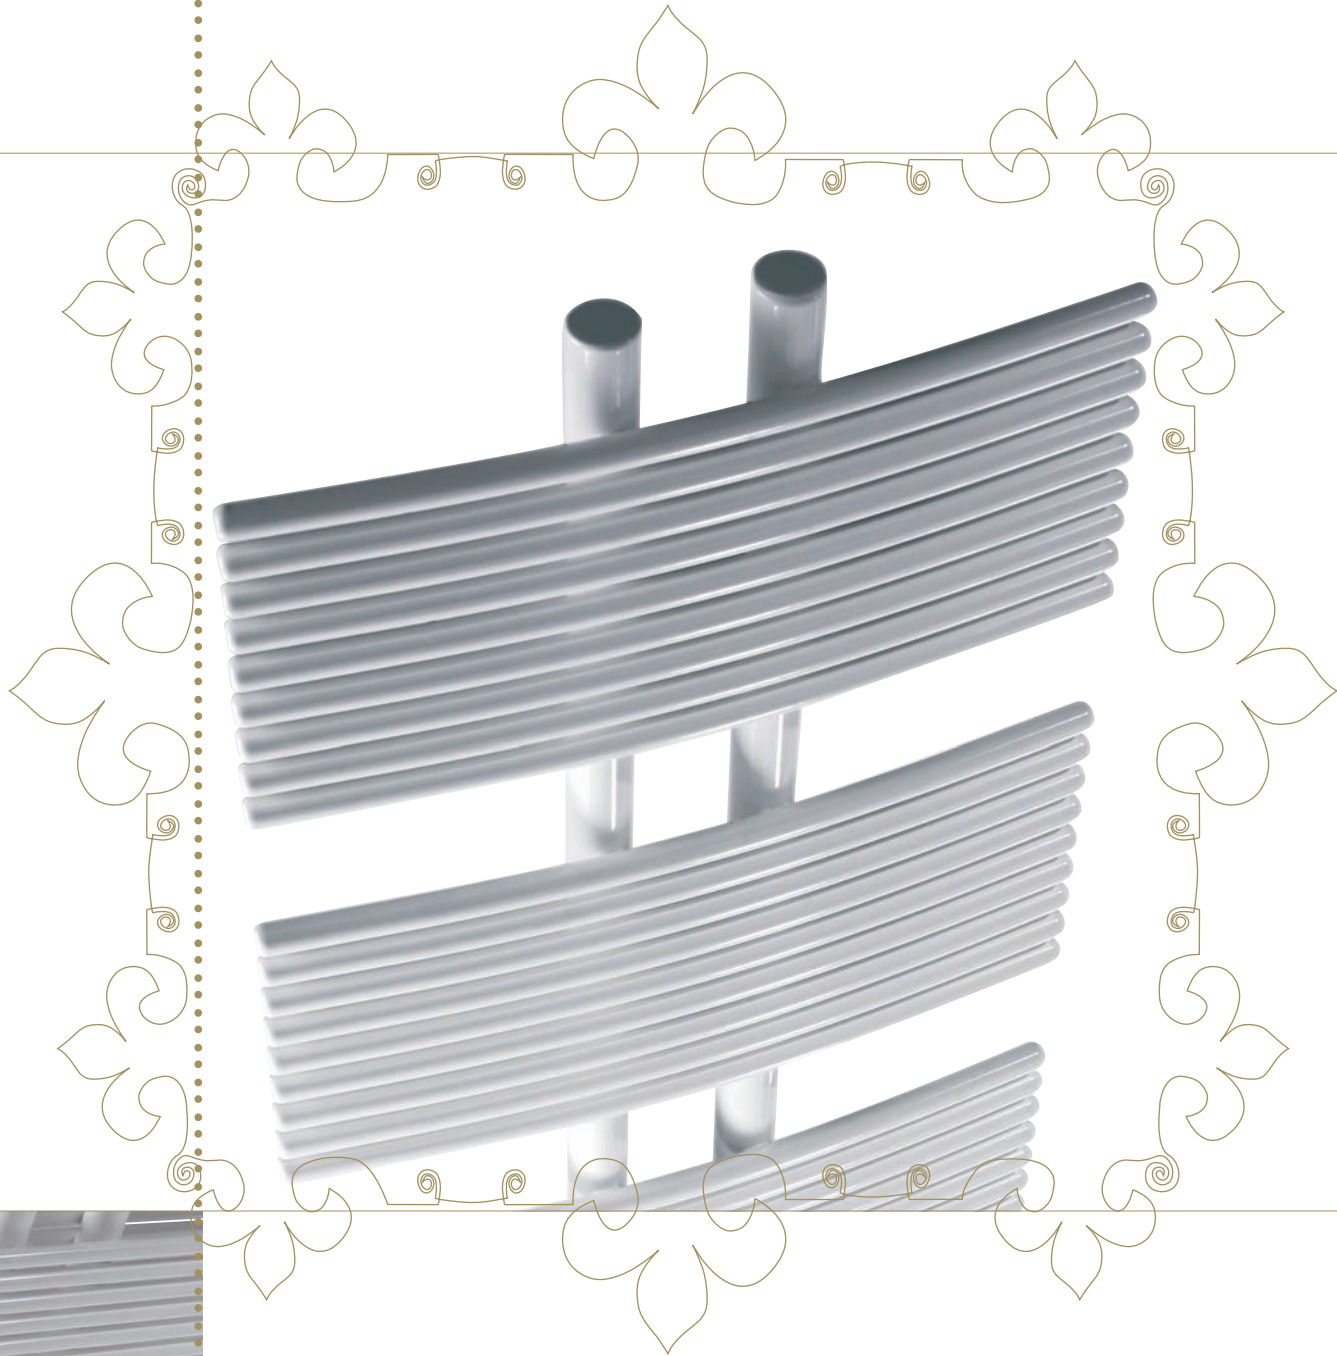


# *Taboe Sani*

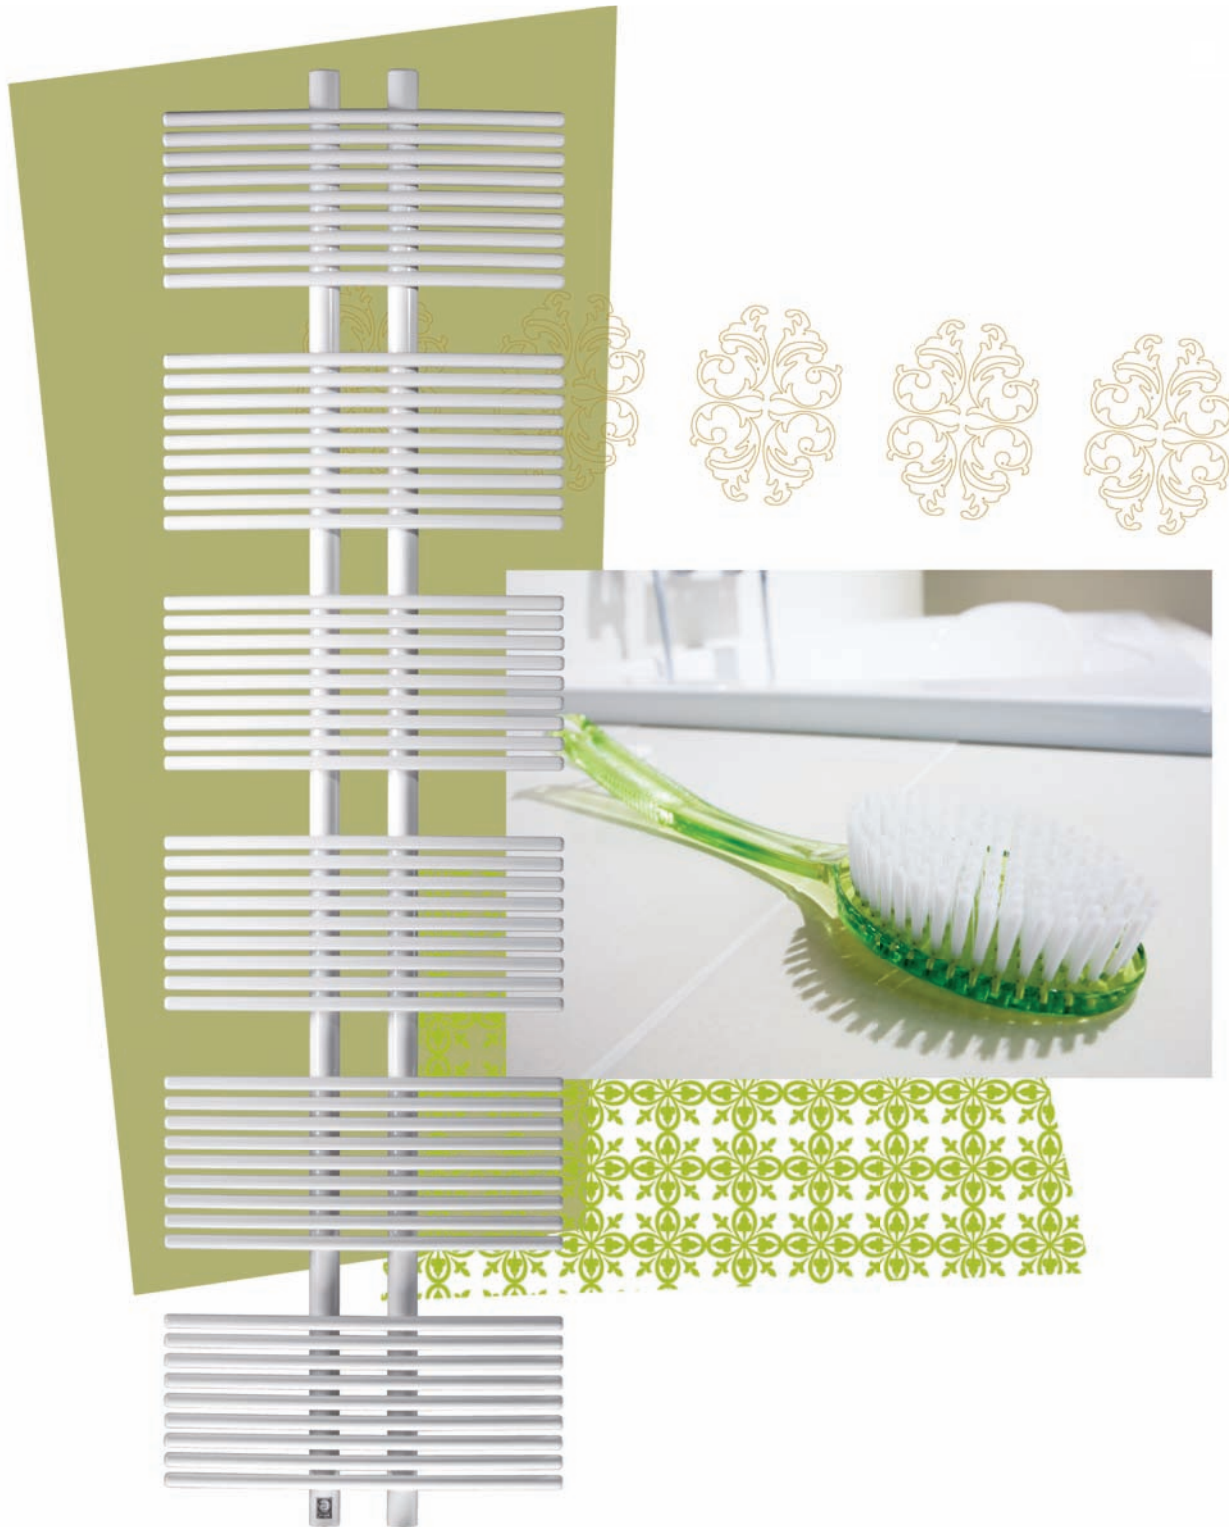



# Taboe Sani

## Dimensions

### TSSW\_Taboe Sani Single Wall




### TSDW\_Taboe Sani Double Wall

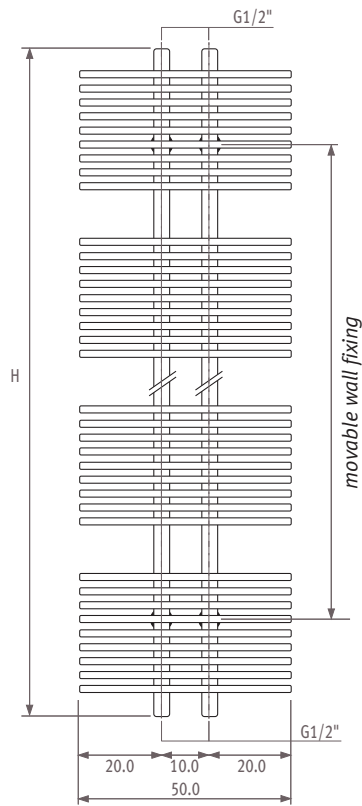


## Connections

Code: 1° number = flow  
2° number = return




### Standard connection

Code 18  
Connection 18 or 81  
To the floor:



To the wall:




### Top end connection

Ordering code: specify 45 or 54 instead of 18.  
Insert pipe is delivered without surcharge, to be mounted in the return. Provide an air vent on the central heating tube.


### With electric element

Ordering code: Standard code 18, and order an electric element.




### Mixed

Ordering code: standard code 18.  
Order an electric element and T-piece.  
- Fit the T-piece together with the electric heating element for connection to the central heating wet system.  
- Never isolate the radiator from the expansion system, in other words never cut off the return of the radiator.




## Range

### Single

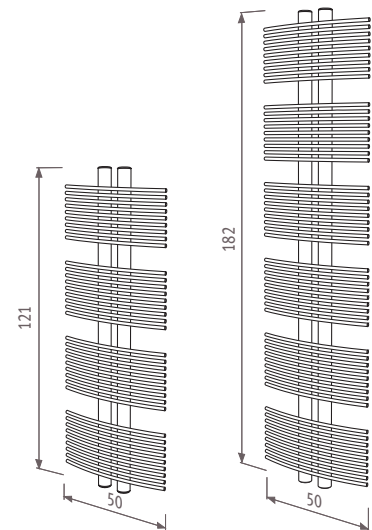

### Double

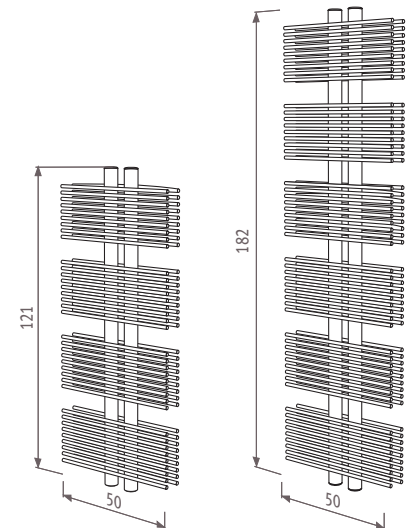

## Outputs

| <b>Taboe Sani_single</b> |  | <i>code</i>          | <i>height</i> | <i>length</i> | <i>colour</i> | <i>conn.</i> |
|--------------------------|--|----------------------|---------------|---------------|---------------|--------------|
|                          |  | ORDERING CODE: TSSW. | 121           | 050.          | XXX           | /18          |


| H   | L 050                |            |
|-----|----------------------|------------|
| 121 | 75/65/20<br>90/70/20 | 590<br>759 |

### Standard delivery

- central connection 18 underneath
- wall fixing set
- chrome-plated air vent and drain cock

### Standard colours:

- white (333) RAL 9016 satin
- white (301) RAL 9010 satin
- sandblast grey metallic 001



| <b>Taboe Sani_double</b> |  | <i>code</i>          | <i>height</i> | <i>length</i> | <i>colour</i> | <i>conn.</i> |
|--------------------------|--|----------------------|---------------|---------------|---------------|--------------|
|                          |  | ORDERING CODE: TSDW. | 121           | 050.          | XXX           | /18          |


| H   | L 050                |             |
|-----|----------------------|-------------|
| 121 | 75/65/20<br>90/70/20 | 800<br>1018 |

### Standard delivery

- central connection 18 underneath
- wall fixing set
- chrome-plated air vent and drain cock

### Standard colours:

- white (333) RAL 9016 satin
- white (301) RAL 9010 satin
- sandblast grey metallic 001




| <b>Taboe Sani_single brushed stainless steel</b> |  | <i>code</i>          | <i>height</i> | <i>length</i> | <i>colour</i> | <i>conn.</i> | <i>type</i> |
|--|--|----------------------|---------------|---------------|---------------|--------------|-------------|
|  |  | ORDERING CODE: TSSW. | 121           | 050.          | 011           | /18          | /SP         |

| H   | L 050                |            |
|-----|----------------------|------------|
| 121 | 75/65/20<br>90/70/20 | 459<br>581 |

### Standard delivery

- brushed stainless steel
- central connection 18 underneath
- wall fixing set
- chrome-plated air vent and drain cock




| <b>Taboe Sani_double brushed stainless steel</b> |  | <i>code</i>          | <i>height</i> | <i>length</i> | <i>colour</i> | <i>conn.</i> | <i>type</i> |
|--|--|----------------------|---------------|---------------|---------------|--------------|-------------|
|  |  | ORDERING CODE: TSDW. | 121           | 050.          | 011           | /18          | /SP         |

| H   | L 050                |            |
|-----|----------------------|------------|
| 121 | 75/65/20<br>90/70/20 | 664<br>847 |

### Standard delivery


- brushed stainless steel
- central connection 18 underneath
- wall fixing set
- chrome-plated air vent and drain cock



Output measured in accordance with EN442, at a water temperature of 75/65 and a room temperature of 20°C ( $\Delta T=50$ ).


## Options

### Electro heating

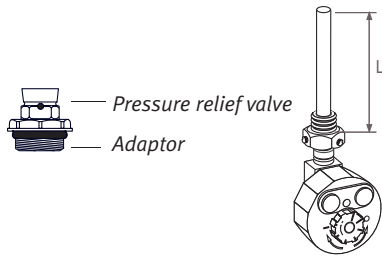


| CODE    | H   | type radiator | WATTS | L    |
|---------|-----|---------------|-------|------|
| 9096.12 | 121 | single        | 900   | 51.5 |
| 9096.13 | 121 | double        | 1200  | 66.0 |
| 9096.13 | 182 | single        | 1200  | 66.0 |
| 9096.14 | 182 | double        | 1500  | 82.0 |

### T-piece for mixed application



| CODE                       | colour        |
|----------------------------|---------------|
| TPCE.004.009               | chrome        |
| TPCE.004.XXX               | 201 up to 233 |
|                            | 301 up to 333 |
| <i>fill in colour code</i> |               |

### Insert pipe for top end connection




Will be delivered without surcharge if the top end connection code is indicated 45 or 54 instead of 18.

| CODE      | H radiator | L   |
|-----------|------------|-----|
| 9097.1100 | 121        | 110 |
| 9097.1660 | 182        | 166 |

### Electro heating element with infra-red operation

Only for Taboe Sani Single


- Finish: white ABS
- Transmission range:  $\pm 6$  m in all directions
- Receiver has to be placed at the back of the radiator.
- Insulation Class 1



| CODE     | WATTS | L  |
|----------|-------|----|
| 9096.510 | 600   | 47 |
| 9096.520 | 900   | 68 |



### Connection electric element

- Fit the electric heating element vertically in the socket 1 or 8. The pressure release valve which is included should be fitted into socket 4 or 5, (3 bar).
- Do not switch the radiator on before filling it completely with water.
- Top up with water after the first total heating up of the radiator.

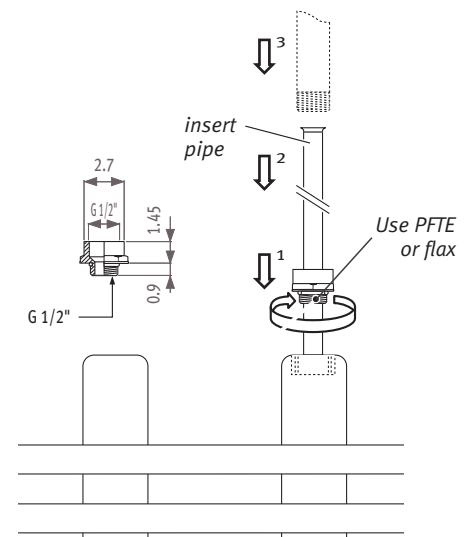

For more information see Technical info.


*Taboe Sani*

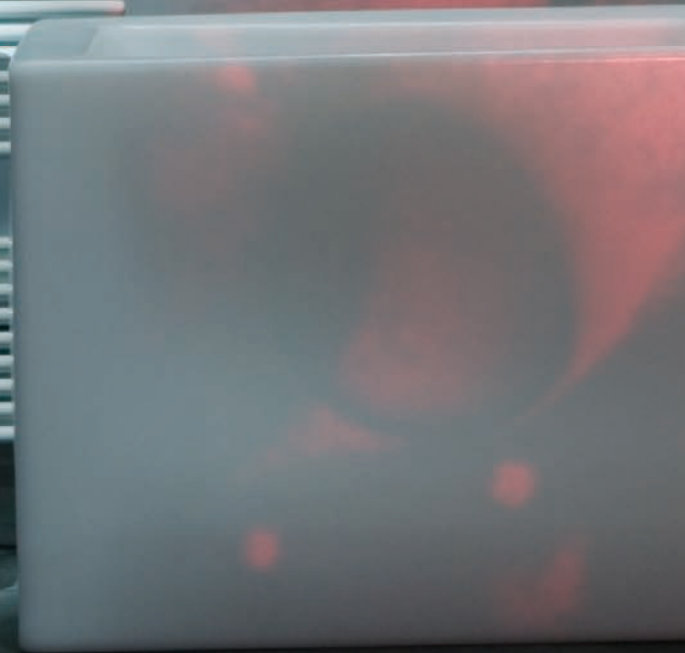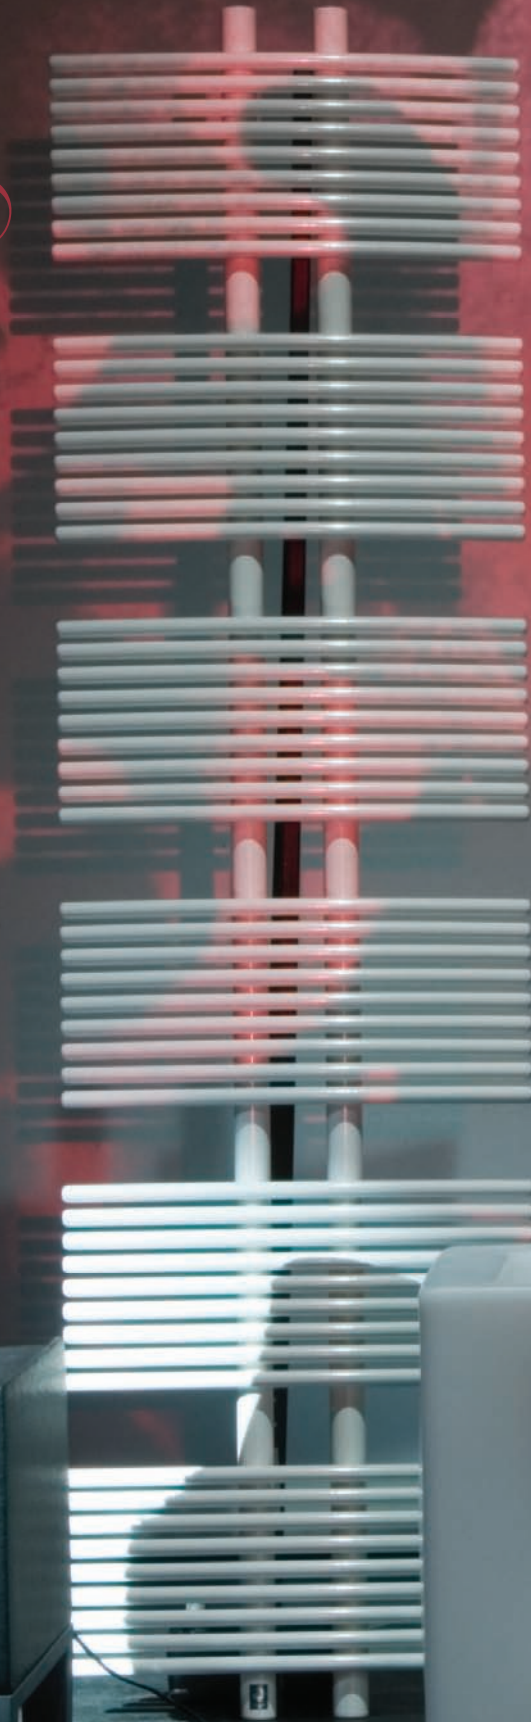

1

2

- 1. Taboe
- 2. Taboe Freestanding

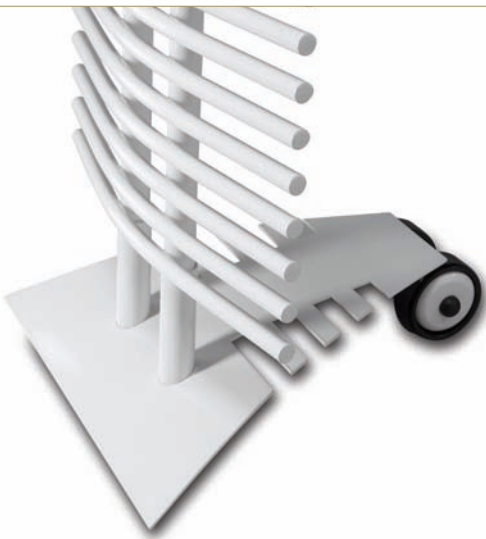



*Taboe*




# Taboe

## Dimensions


### TABW\_Taboe Wall

- for central heating
- 100% electric
- mixed

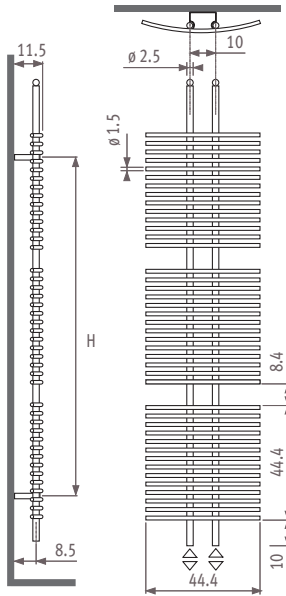


### TABF\_Taboe Free-standing

- with electric element

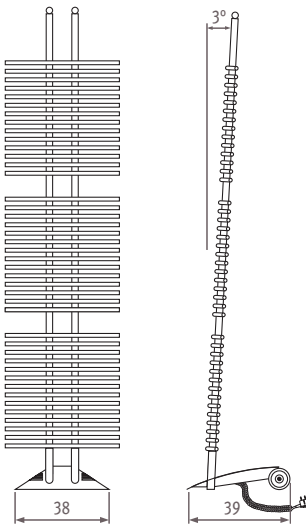

## Connections




### Standard connection


Code 18

Connection 18 or 81

To the floor:




To the wall:



### With electric element

Fitted with an on/off switch: order wall model EL (electric).

Fitted with thermostatic: order wall mounted model central heating + element. See page 78




### Mixed

Ordering code: standard code 18.

Order an electric element and T-piece.


- Fit the T-piece together with the electric heating element for connection to the central heating wet system.

- Never isolate the radiator from the expansion system, in other words never cut off the return of the radiator.




## Range

### TABW\_Taboe Wall

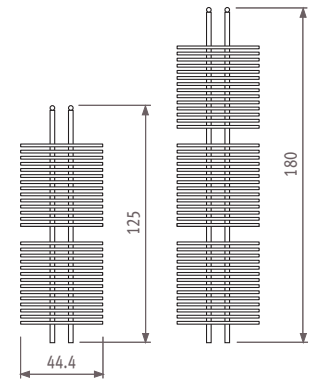

### TABF\_Taboe Free-standing

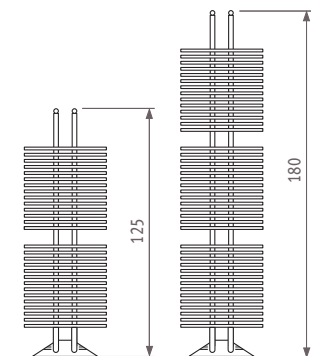

## Outputs


### Taboe wall mounted model\_C.H.

code height length colour conn.  
ORDERING CODE: TABW. 125 044. XXX /18

| H   | L 044                |            |
|-----|----------------------|------------|
| 125 | 75/65/20<br>90/70/20 | 432<br>546 |
| 180 | 75/65/20<br>90/70/20 | 629<br>792 |

#### Standard delivery

- 2 wall fixing brackets in the same colour as the radiator
- invisible inside sockets 1/2" at the bottom end of the collector tubes
- air venting via the round balls at the top end of the collector tubes




### Taboe wall mounted model\_EL

code height length colour conn.  
ORDERING CODE: TABW. 125 044. XXX /EL

| H   | L 044 |     |
|-----|-------|-----|
| 125 | WATTS | 600 |
| 180 | WATTS | 900 |

#### Standard delivery

- Supplied completely fitted and filled, including electric heating element with a cable of 2.5 m and a plug with an on / off switch
- 2 wall fixing brackets in the same colour as the radiator




### Taboe wall mounted model\_MX

code height length colour conn.  
ORDERING CODE: TABW. 125 044. XXX /MX

| H   | L 044 |     |
|-----|-------|-----|
| 125 | WATTS | 600 |
| 180 | WATTS | 900 |

#### Standard delivery

- 2 wall fixing brackets in the same colour as the radiator
- invisible inside sockets 1/2" at the bottom end of the collector tubes
- electric element with thermostat Class I Length wire: 1.2 m
- T-piece in the same colour as the radiator
- air venting via the round balls at the top end of the collector tubes




### Taboe Freestanding\_EL

code height length colour conn.  
ORDERING CODE: TABF. 125 044. XXX /EL

| H   | L 044 |     |
|-----|-------|-----|
| 125 | WATTS | 600 |
| 180 | WATTS | 900 |

#### Standard delivery

- Supplied completely fitted and filled, inclusive electric heating element with a cable of 2.5 m and a plug with an on / off switch
- foot in the same colour as the radiator

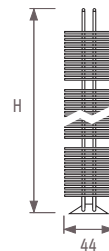

Output measured in accordance with EN442, at a water temperature of 75/65 and a room temperature of 20°C ( $\Delta T=50$ ).